


CAM-U



SAE/MS Male Adapter

Hy-Lok



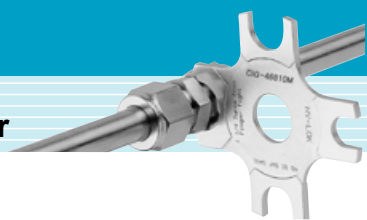

SAE / MS Male Adapter CAM-U

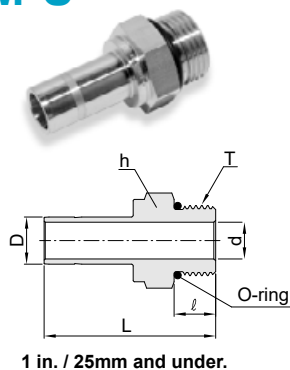

Connectors Fractional Hy-Lok Port to SAE / MS Straight Thread Boss

Part No.	Tube OD D		T SAE/MS Straight Thread Size	d [†] min.	Width across flat h (in.)	ℓ	L	O-ring Uniform Size Number
	in	mm						
CAM 2 - 2U	1/8	3.17	5/16-24	2.0	7/16	7.6	30.5	-902
CAM 4 - 4U	1/4	6.35	7/16-20	4.3	9/16	9.1	35.3	-904
CAM 6 - 4U	3/8	9.52	7/16-20	5.1	9/16	9.1	37.1	-904
CAM 6 - 6U	3/8	9.52	9/16-18	6.9	11/16	10.0	38.6	-906
CAM 6 - 8U	3/8	9.52	3/4-16	6.9	7/8	11.1	40.5	-908
CAM 8 - 6U	1/2	12.7	9/16-18	7.5	11/16	10.0	44.2	-906
CAM 8 - 8U	1/2	12.7	3/4-16	9.4	7/8	11.1	46.1	-908
CAM 10 - 10U	5/8	15.87	7/8-14	11.9	1	12.7	49.3	-910
CAM 12 - 12U	3/4	19.05	1-1/16-12	14.7	1-1/4	15.1	53.4	-912
CAM 16 - 16U	1	25.40	1-5/16-12	20.3	1-1/2	15.1	61.3	-916
CAM 20 - 20U ^①	1-1/4	31.75	1-5/8-12	25.9	1-7/8	15.1	72.2	-920
CAM 24 - 24U ^①	1-1/2	38.10	1-7/8-12	31.8	2-1/8	15.1	83.3	-924

[†] The d dimension is the minimum nominal opening. These fittings may have a larger opening at the pipe/straight thread end.

^① Furnished with nut and preswaged ferrules.

All dimensions are in millimeters unless otherwise specified.
Dimensions are for reference only, subject to change.